


DM30

PRESTAZIONI/PERFORMANCES

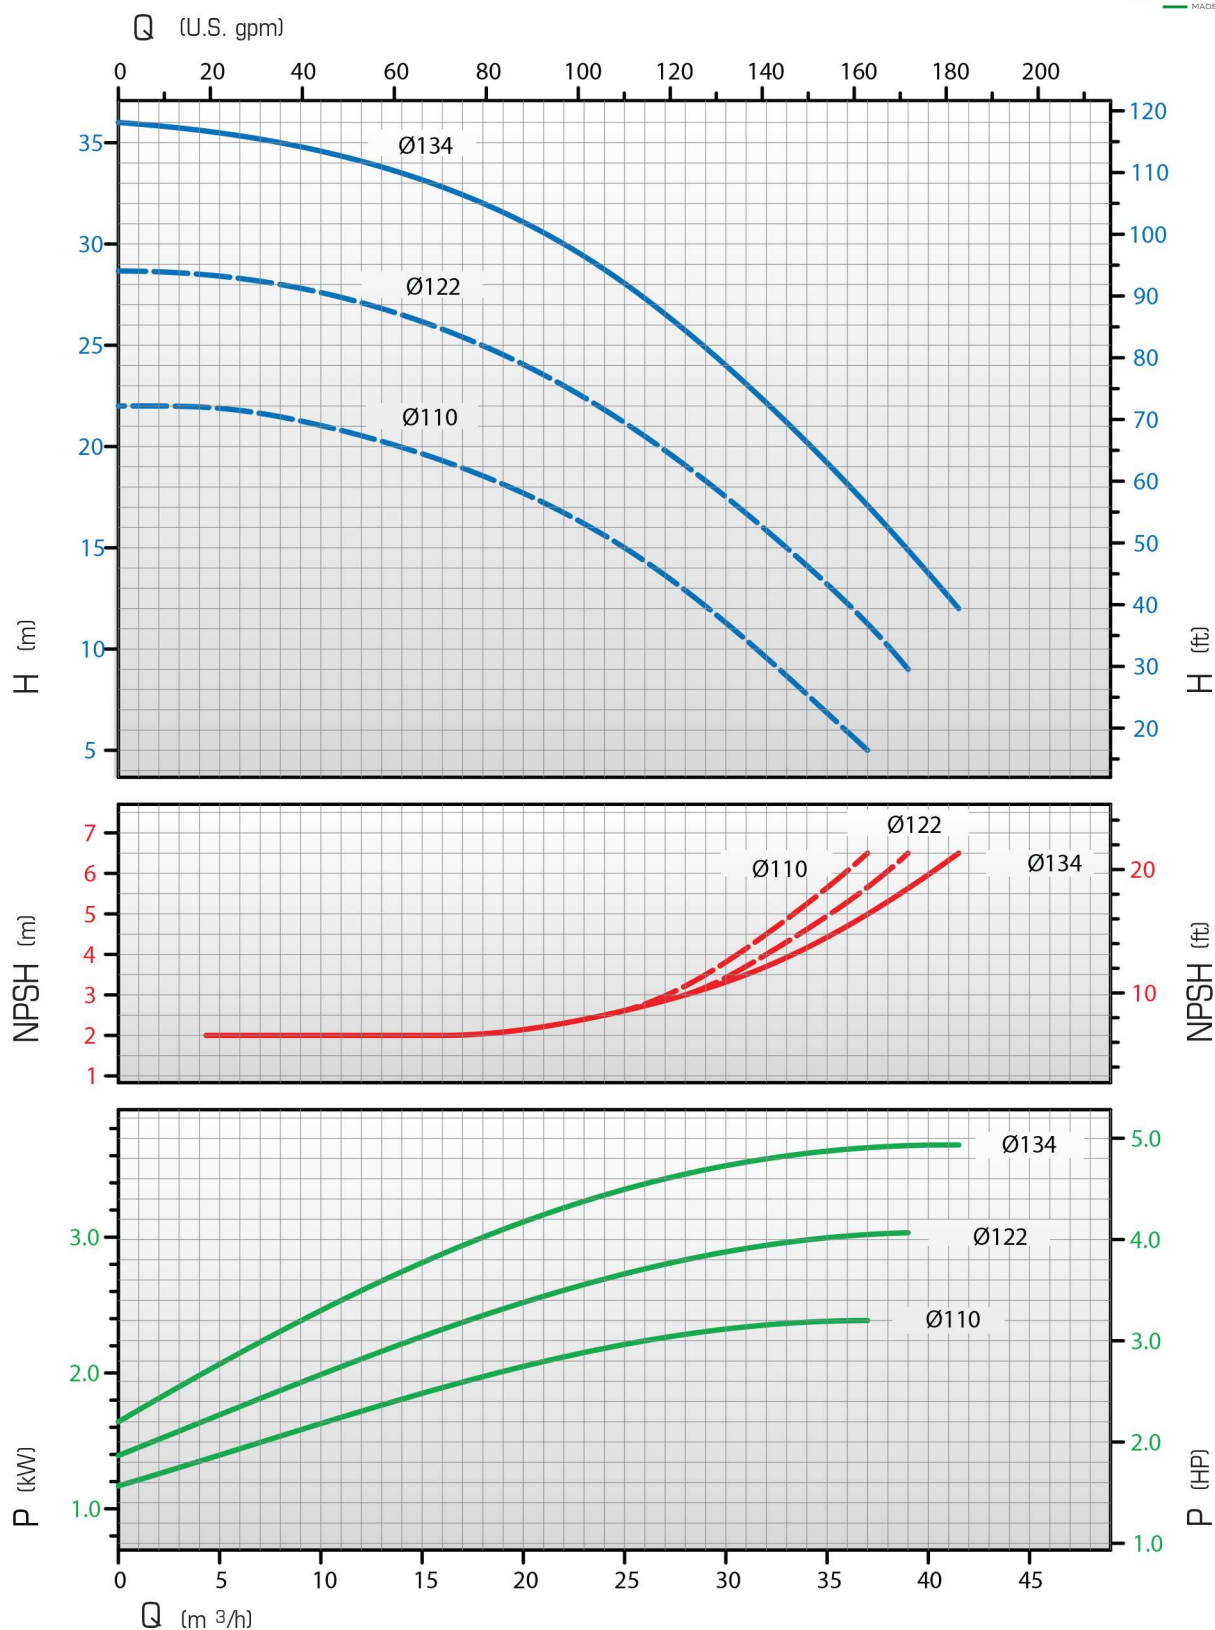

STANDARD IEC - IP 55 - CLASS F
 2 POLE - 3.500rpm
 3PHASE 230/400V 50/60 H
 SINGLEPHASE 230V 60 Hz

IMPELLER SELECTION/SPECIFIC GRAVITY

girante/impeller	motor 2,2 kW (3Hp)	motor 3 kW (4Hp)	motor 4 kW (5.5Hp)
Ø 134 mm	up to 1,1	up to 1,5	up to 1,8
Ø 122 mm	up to 1,4	up to 2	up to 2
Ø 110 mm	up to 1,8	up to 2	up to 2